


Serie GIMME5 EVO



GIMME5 EVO



FIVE700A
WHITE



FIVE738A
CYCLAMEN



FIVE746A
SKY BLUE



FIVE714A
GREY



FIVE795A
GRAPHITE




FIVE728A
LEMON YELLOW



FIVE739A
VELVET RED



FIVE751A
LIME GREEN



FIVE712A
LIGHT GREY



FIVE796A
SILVER



FIVE720A
MEDIUM YELLOW



FIVE761A
AUBERGINE



FIVE752A
APPLE GREEN



FIVE766A
BEIGE

Fluo Gimme 5



FIVE722A
PUMPKIN YELLOW



FIVE770A
PURPLE



FIVE754A
GRASS GREEN



FIVE763A
CAPPUCCINO



FIVE FLUO20A
NEON YELLOW



FIVE734A
ORANGE



FIVE748A
NAVY BLUE



FIVE750A
GREEN



FIVE764A
LEATHER



FIVE FLUO30A
NEON ORANGE



FIVE732A
FLAME RED



FIVE742A
ELECTRIC BLUE



FIVE780A
FOREST GREEN



FIVE760A
BROWN



FIVE FLUO40A
NEON PINK




FIVE730A
RED



FIVE740A
ROYAL BLUE



FIVE781A
OLIVE GREEN



Special Gimme 5



FIVE FLUO50A
GREEN FLUO



FIVE762A
BORDEAUX



FIVE743A
LILAC



FIVE783A
AQUAMARINE



FIVE792A
GOLD



FIVE FLUO46A
NEON BLUE



FIVE737A
BLUSH PINK



FIVE744A
LIGHT BLUE



FIVE782A
TURQUOISE



FIVE793A
BRONZE



FIVE736A
PINK



FIVE741A
POWDER BLUE



FIVE710A
BLACK



FIVE794A
COPPER

Serie GIMME5 EVO
FIVE700A | SPECIAL | FLUO

B-FLEX SERIES GIMME 5 is a polyurethane opaque film suitable for heat transfer on cotton fabrics, cotton and polyester and polyester and acrylic garments. Its polyester adhesive carrier allows for easy repositioning of characters accidentally removed.

B-FLEX SERIES GIMME 5 can be pressed **IN ONLY 4 SECONDS** on T-shirts, sportswear or uniforms for work. Because the material is thin and elastic the fabric, underneath remains soft and pliable. It is also great for multilayer applications.

! SUGGESTED FABRICS:
 cotton, polyester, mixed, printed with NON sublimatic colors.

CUT:
 cutting plotter, 45° blade, laser.

WASHING:
 wait 12 hours after application.


STANDARDS:
 Oeko-Tex Standard 100 Class I.



FIVE700A



SPECIAL

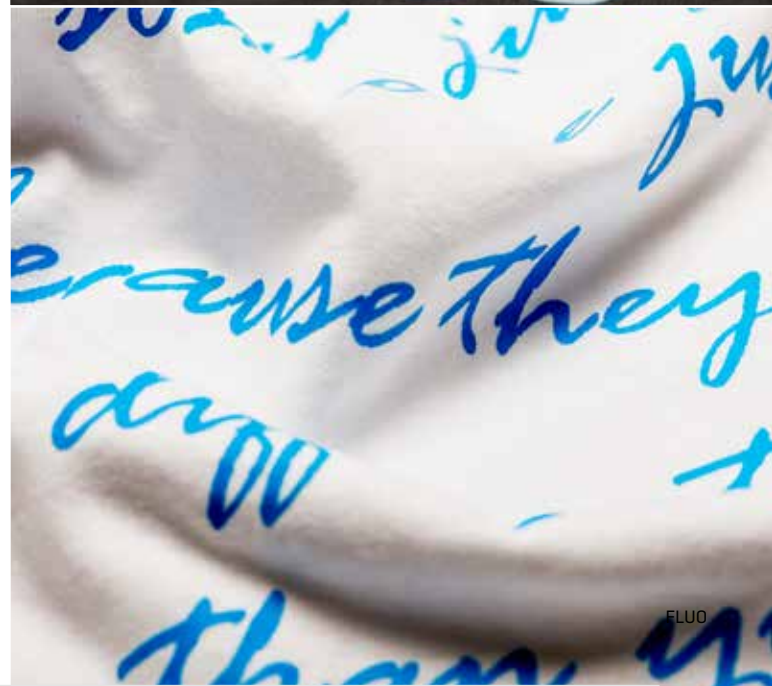

FLUO

GIMME5 EVO

0,5 cm Minimum cutting size

PU COMPOSITION
 PU Polyurethane

TECHNICAL FEATURES

THICKNESS 80 μ	MATTE FINISHING	OPAQUE	ADHESIVE LINER	MIRROR CUT

APPLICATION

TEMPERATURE 140°C - 285°F	4"	3,5 bar	LINER REMOVAL HOT

WASHING

90°	DRY CLEANING	DRYER



FIND MORE HERE